

PRODUCT SPECIFICATION	Rev 1.0	Page 4(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)	Date	2004.12.10

I . Product Specification

1.1. Scope

This product specification has been prepared to specify the rechargeable lithium-ion polymer battery ('cell')

1.2. Description and Model

2.1 Description	Rechargeable Lithium ion Polymer Battery (for remote controller)
2.2 Model	SPB605060

1.3. Nominal Specifications

Item	Specification
3.1 Nominal Capacity	1900mAh (0.2C discharge)
3.2 Charging Voltage	4.2V *
3.3 Nominal Voltage	3.7V
3.4 Charging Method	CC-CV (constant voltage with limited current)
3.5 Charging Current	Standard charge: 950mA Rapid charge : 1900mA
3.6 Charging Time	Standard charge : 3hours Rapid charge : 2.5hours
3.7 Max. Charge Current	1.9A
3.8 Max. Discharge Current	22.8A(12C)
3.9 Discharge Cut-off Voltage	2.5V
3.10 Cell Weight	Less than 38g
3.11 Cell Dimension	Thickness : 6.0±0.1mm max. (Initial fully charged cell) Width : 50.0±0.3mm Height : 60.0+2.0/-0.0mm
3.12 Operating Temperature	Charge : 0 to 45 °C Discharge: -20 to 60 °C
3.13 Storage Temperature	1 year : -20~25 °C(1*) 3 months : -20~45 °C(1*) 1 month : -20~60 °C(1*)

Note (1): If the cell is kept as ex-factory status (50% of charge),
the capacity recovery rate is more than 80%.

	PRODUCT SPECIFICATION	Rev 1.0	Page 5(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)		Date	2004.12.10

1.4. Outline Dimensions

See the Chapter 2

1.5. Appearance

There shall be no such defects as scratch, rust, discoloration, leakage which may adversely affect commercial value of the cell.

1.6. Standard Test Conditions

1.6.1 Environmental Conditions

Unless otherwise specified, all tests stated in this specification are conducted at temperature $25\pm 5^{\circ}\text{C}$ and humidity $65\pm 20\%$.

1.6.2 Measuring Equipment

(1) Ammeter and Voltmeter

The ammeter and voltmeter should have an accuracy of the grade 0.5 or higher.

(2) Slide caliper

The slide caliper should have 0.05 mm scale.

(3) Impedance meter

The impedance meter with AC 1kHz should be used.

1.7. Characteristics

1.7.1 Standard Charge

This "Standard Charge" means charging the cell with charge current 950mA and constant voltage 4.2V for 3hours or 190mA cut-off at 25°C .

1.7.2 Rated Charge

This "Rated Charge" means charging the cell with charge current 950mA and constant voltage 4.2V for 3hrs or 190mA cut-off at 25°C .

1.7.3 Standard Discharge Capacity

The standard discharge capacity is the initial discharge capacity of the cell, which is measured with discharge current of 380mA with 2.5V cut-off at 25°C within 1 hour after the standard charge.

$$\text{Standard Discharge Capacity} \geq 1900\text{mAh}$$

1.7.4 Rated Discharge Capacity

The rated discharge capacity is the initial discharge capacity of the cell, which is measured with discharge current of 950mA with 2.5V cut-off at 25°C within 1 hour after the rated charge.

$$\text{Rated Discharge Capacity} \geq 1900\text{mAh}$$

PRODUCT SPECIFICATION	Rev 1.0	Page 6(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)	Date	2004.12.10

1.7.5 Initial internal impedance

Initial internal impedance measured at AC 1kHz after rated charge.

$$\text{Initial internal impedance} \leq 13\text{m}\Omega$$

1.7.6 Charge Rate Capabilities

Discharge capacity is measured with constant current 950mA and 2.5V cut-off after the cell is charged with 4.2V as follows.

Items	Charge Condition			
Current	0.2C (0.38A)	0.5C (0.95A)	1.0C (1.9A)	2.0C (3.8A)
Cut-off	7hr or 0.1C	3hr or 0.1C	2.5hr or 0.1C	2.5h or 0.1C
Relative Capacity	100%	100%	95%	90%

Note: Percentage as an index of the rated discharge capacity (=1850mAh) is 100%.

1.7.7 Discharge Rate Capabilities

Discharge capacity is measured with the various currents in under table and 2.5V cut-off after the rated charge.

Item	Discharge Condition						
Current	0.2C (0.38A)	0.5C (0.95A)	4C (7.6A)	6C (11.4A)	8C (15.2A)	10C (19A)	12C (22.8A)
Relative Capacity	100%	100%	95%	95%	95%	90%	90%

Note: Percentage as an index of the rated discharge capacity (=1900mAh) is 100%.

1.7.8 Temperature Dependence of Discharge Capacity

Capacity comparison at each temperature, measured with discharge constant current 950mA and 3V cut-off after the rated charge is as follows.

Charge Temperature	Discharge temperature					
25℃	-20℃	-10℃	0℃	25℃	40℃	60℃
Relative Capacity	70%	80%	85%	100%	100%	95%

Note: If charge temperature and discharge temperature is not the same, the interval for temperature change is 4 hours.

Percentage as an index of the rated discharge capacity (=1900mAh) is 100%.

PRODUCT SPECIFICATION		Rev 1.0	Page 7(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)		Date	2004.12.10

1.7.9 Temperature Dependence of Charge Capacity

Capacity comparison at each temperature, measured with discharge constant current 950mA and 2.5V cut-off after the rated charge is as follows.

Items	Charge temperature			Discharge temperature 25℃
	0℃	25℃	45℃	
Relative Capacity	80%	100%	100%	

Note: If charge temperature and discharge temperature is not the same, the interval for temperature change is 4 hours.
Percentage as an index of the rated discharge capacity (=1900mAh) is 100%.

1.7.10 Cycle Life

Each cycle is an interval between the charge (charge current 1330mA) with 2.0h or 0.1C cut-off and the discharge (discharge current 4750mA) with 2.5V cut-off. Capacity is measured at 100cycles, 300cycles.

100cyc. Capacity ≥ 1615mAh (85% of the rated discharge capacity)
300cyc. Capacity ≥ 1425mAh (75% of the rated discharge capacity)

1.7.11 Storage Characteristics

Capacity after storage for 30days at 25℃ after the rated charged, measured with discharge current 950mA with 2.5V cut-off at 25℃.

Capacity retention(after the storage) ≥ 1710mAh (90% of the rated discharge capacity)

1.8. Mechanical Characteristics

1.8.1 Vibration Test

Test method: This means the endurance of the cell against vibration.

Frequency and amplitude : 10Hz → 55Hz → 10Hz / 0.8mm

Sweep speed : 1 ± 0.055Hz/min

Criteria: No damage such as leakage, flame, or fire was allowed.

1.9. Environmental Characteristics

1.9.1 Thermal Shock

Test method: The Cell(rated charged) is repeatedly tested with 20 times heat cycling, which means maintaining the cell for 2hours at -40℃ and 85℃ respectively. Inspect its appearance and measure its thickness right after thermal shock. Measure the recovered capacity by rated charge/discharge cycling after rated discharging(950mA, 2.5V cut-off) at 25℃.

Criteria: No leakage, No Fire
Recovery > 1330mAh (70% of the rated discharge capacity)

	PRODUCT SPECIFICATION	Rev 1.0	Page 8(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)		Date	2004.12.10

1.9.2 Humidity

Test method: The Cell(rated charged) is exposed to 50 °C, 95%RH. for 10days
Inspect appearance and measure thickness right after humidity test.
Measure the recovered capacity by rated charge/discharge cycling after
rated discharging(950mA, 2.5V cut-off) at 25 °C.

Criteria: No leakage
Recovery > 1710mAh (90% of the rated discharge capacity)

1.10. Safety

1.10.1 External Short-circuit Test

Test method: To short-circuit the standard charged cell by connecting positive and
negative terminal by less than 50mΩ wire for 2.5 hour.

Criteria: No smoke, No fire, and no explosion.

1.10.2 Reverse Charge Test

Test method: To charge reversely the standard charged cell with charge current
1900mA for 2.5 hours.

Criteria: No fire, and no explosion.

1.10.3 Heating Test

Test method: To heat the standard charged cell at heating rate 5 °C per minute up to
150 °C and keep the cell in oven for 10 minutes.

Criteria: No fire, and no explosion within 10min.

1.10.4 Crush

Test method: To crush the standard charged cell with force of 13kN.
(crushed side is longitudinal and wide axis)

Criteria: No fire, and no explosion.

1.10.5 Impact

Test method: To place 7.9mm diameter bar across the center of standard charged cell,
and drop 9.1kg weight from 61cm height onto the cell.
(Impacted side is longitudinal and wide axis.)


Criteria: No fire, and no explosion.

1.10.6 Overcharge Test

Test method: To charge the standard charged cell with 6.0V and 3800mA at 25 °C
for 1.5 hours.

Criteria: No fire, and no explosion.

2. Out View drawing for SPB605060H1

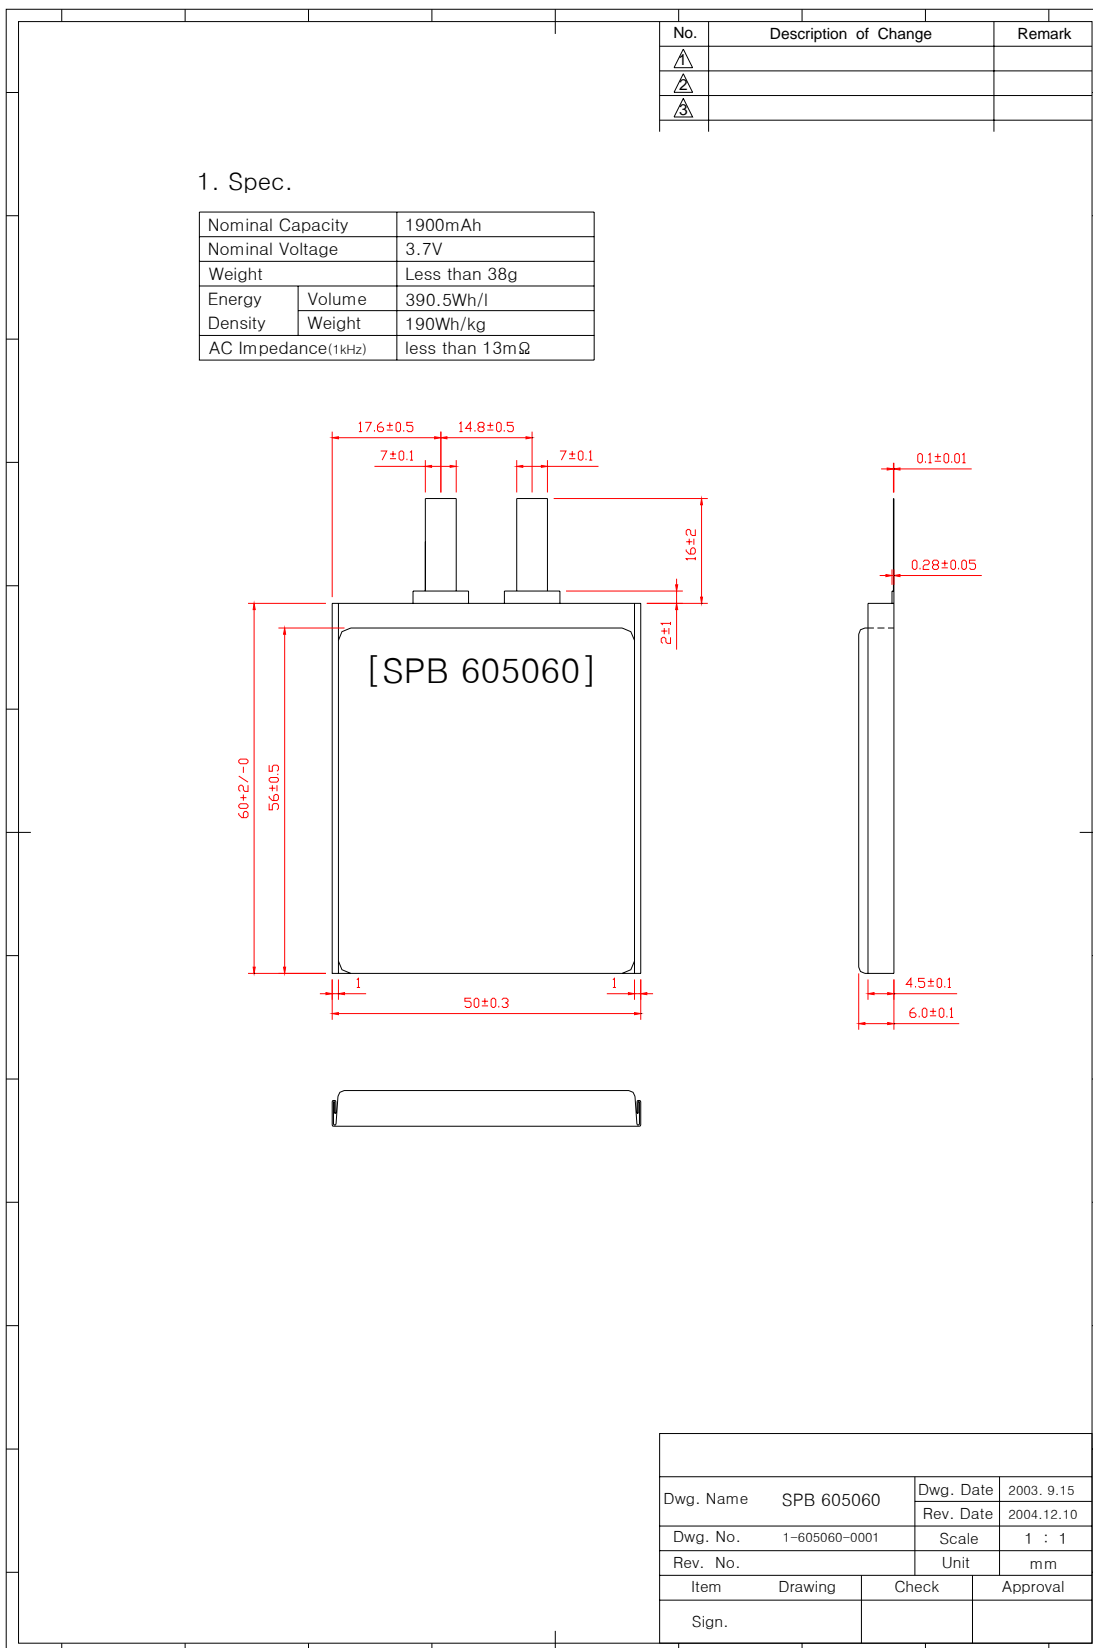

	PRODUCT SPECIFICATION	Rev 1.0	Page 11(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)		Date	2004.12.10

3. PACKING SPECIFICATION

3.1. Returnable Box

1. Returnable Box Package

1.1 Dimension: 390(W) X 280(D) x 150(H)

1.2 Packing Quantity: 200 CELL / BOX

1.3 Packing Method: 16 CELL / small box(15 small box / BOX)

1.4 Weight: less than 13 Kg/Box

	PRODUCT SPECIFICATION	Rev 1.0	Page 12(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)		Date	2004.12.10

4. Handling Instruction

4.1. General

The cells have to be handle carefully according to the specification.

Here are some more to be followed.

4.2. Storage

The cell requested to be stored under the following conditions:

- a. Indoor storage in a cool circumstances without direct sun light.
- b. Store the cell in a dry location with low humidity, and a temperature range of -20°C to $+30^{\circ}\text{C}$.

In case of the long term storage

- a. As long-term storage can accelerate battery self-discharge and lead to the deactivation of the cells. To minimize the deactivation effect, store the cell in a temperature range of $+10^{\circ}\text{C}$ to $+30^{\circ}\text{C}$.
- b. When charging for the first time after long-term storage, deactivation of the cells have led to decreased capacity. Recover such cell to original performance through repeating several cycles of full charging and discharging.
- c. When store the cell for more than 6 month, charge at least once charing require per 6 months to prevent leakage and deterioration in performance due to self-discharging.

4.3. Charging

- a. Use suitable charger with the specified voltage and current. We strongly recommend the smart battery charger. We can recommend the usage or specification of the charger manufacturing. If you want to get the information about it, please contact us.
- b. Never attempt reverse charging. Charging with polarity reversed can cause a reversal in the cell polarity, causing gas pressure inside of the cell to rise, which can be lead to leakage of the cell.
- c. Avoid overcharing. Repeated overcharging can be lead to deterioration in cell performance. and over-heat occured.
- d. Charging efficiency drops at temperatures above 40°C .

	PRODUCT SPECIFICATION	Rev 1.0	Page 13(13)
SPB605060H1 (Rechargeable Li-ion Polymer Battery)		Date	2004.12.10

4.4. Protection from unexpected damaged to the cell

- a. (+) and/or (-) terminals must not be connected in metal wire, necklace, chaings.
- b. Do not drop cells from height in order to prevent them from possible malfunction or damage.
- c. Do not twist or bend cells in order to prevent possible damage.

4.5. For Safety

- a. Do not disassemble cells.
- b. Do not use the cell when something abnormal found such as smells, deformation, discoloration, and so on.
- c. When the electrolyte leakage occurs, do not touch the liquid.
- d. Once watered, cells may have potential malfunctions. Do not use those cells.
- e. Do not have cells in the hot-temperature (60°C or more).
- f. Do not put cells into fire.
- g. Do not crush/nail cells.
- h. Do not apply solder directly to cells.